


Concrete Screw

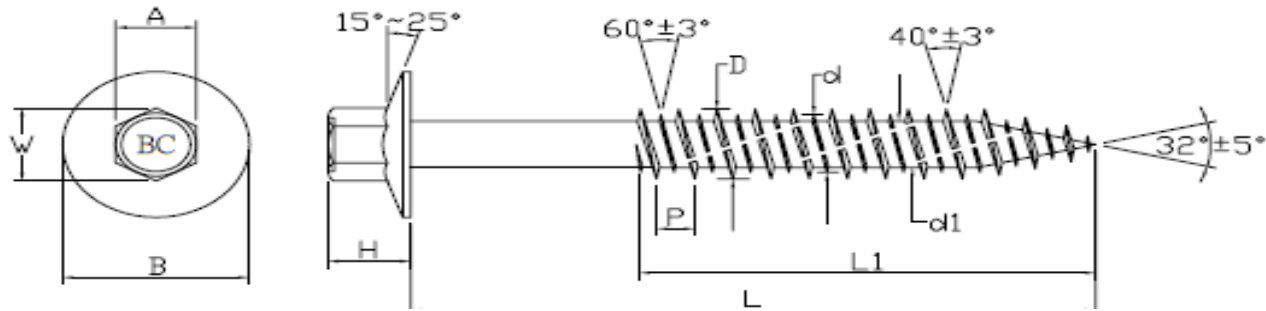

Hex Flange Washer Head Concrete Screw								
Size	Total Head Height	A/F	A/C	Washer Dia	Hi-Thread Dia	Minor Dia	Pitch	Wire Dia
1/4	H	A	W	B	D	d1	P	4.8
	4.90-5.46	7.75-7.92	8.64 MIN	6.20-6.50	5.1	4.35-4.60	3.50-3.70	

Remarks	
1.	Material : 1022
2.	Surface : MIN 450 HV
3.	Core : 240~450 HV
4.	Carburizing : 0.10~0.23
5.	Torque : MIN 164 kg-Cm
6.	Brand : BoltConnect (BC) by Shorpioen

Length Tolerance	
L = +/- 1.5mm	
L	L1
≤ 1-3/4	Fully Thread
2-1/4	40 ± 2.0 mm
2-3/4	46 ± 2.0 mm
≥ 3-1/4	55 ± 2.0 mm