


NUTS

HEX SLOTTED NUTS

Steel

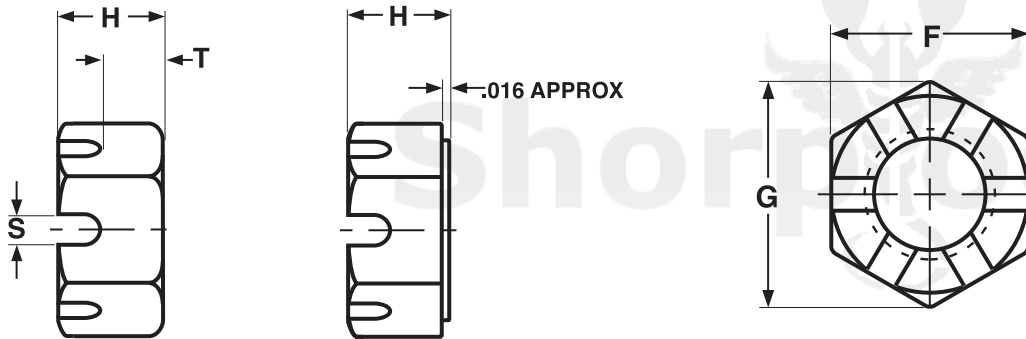

HEX SLOTTED NUTS														ANSI/ASME B18.2.2
Nominal Size or Basic Major Diameter of Thread		F			G		H			T		S		Runout of Bearing Surface FIM
		Width Across Flats			Width Across Corners		Thickness			Unslotted Thickness		Width of Slot		
		Basic	Max	Min	Max	Min	Basic	Max	Min	Max	Min	Max	Min	
1/4	0.2500	7/16	0.438	0.428	0.505	0.488	7/32	0.226	0.212	0.14	0.12	0.10	0.07	0.015
5/16	0.3125	1/2	0.500	0.489	0.577	0.557	17/64	0.273	0.258	0.18	0.16	0.12	0.09	0.016
3/8	0.3750	9/16	0.562	0.551	0.650	0.628	21/64	0.337	0.320	0.21	0.19	0.15	0.12	0.018
7/16	0.4375	11/16	0.688	0.675	0.794	0.768	3/8	0.385	0.365	0.23	0.21	0.15	0.12	0.018
1/2	0.5000	3/4	0.750	0.736	0.866	0.840	7/16	0.448	0.427	0.29	0.27	0.18	0.15	0.019
9/16	0.5625	7/8	0.875	0.861	1.010	0.982	31/64	0.496	0.473	0.31	0.29	0.18	0.15	0.020
5/8	0.6250	15/16	0.938	0.922	1.083	1.051	35/64	0.559	0.535	0.34	0.32	0.24	0.18	0.021
3/4	0.7500	1-1/8	1.125	1.088	1.299	1.240	41/64	0.665	0.617	0.40	0.38	0.24	0.18	0.023
7/8	0.8750	1-5/16	1.312	1.269	1.516	1.447	3/4	0.776	0.724	0.52	0.49	0.24	0.18	0.025
1	1.0000	1-1/2	1.500	1.450	1.732	1.653	55/64	0.887	0.831	0.59	0.56	0.30	0.24	0.027
1-1/8	1.1250	1-11/16	1.688	1.631	1.949	1.859	31/32	0.999	0.939	0.64	0.61	0.33	0.24	0.030
1-1/4	1.2500	1-7/8	1.875	1.812	2.165	2.066	1-1/16	1.094	1.030	0.70	0.67	0.40	0.31	0.033
1-3/8	1.3750	2-1/16	2.062	1.994	2.382	2.273	1-11/64	1.206	1.138	0.82	0.78	0.40	0.31	0.036
1-1/2	1.5000	2-1/4	2.250	2.175	2.598	2.480	1-9/32	1.317	1.245	0.86	0.82	0.46	0.37	0.039
2	2.0000	3	3.000	2.900	3.464	3.306	1-23/32	1.759	1.679	1.24	1.20	0.52	0.43	0.048

Description	Hex nut with opposed slots cut into the top of the nut through the centers of the flats. The slots are on the end opposite the nut's bearing surface.
Applications/ Advantages	The slots are for the insertion of a cotter pin to secure the nut when used with a drilled shank fastener.
Material	Nuts shall be made from a low-carbon steel which conforms to the following chemical composition requirements-- Carbon: 0.47% max.; Phosphorus: 0.12% max.; Sulfur: 0.23% max..
Hardness	Rockwell C32 maximum
Proof Load	72,000 psi.
Plating	See Appendix-A for plating information.