


NYLON FASTENERS

CABLE CLAMPS

1/2" Wide Contact Area

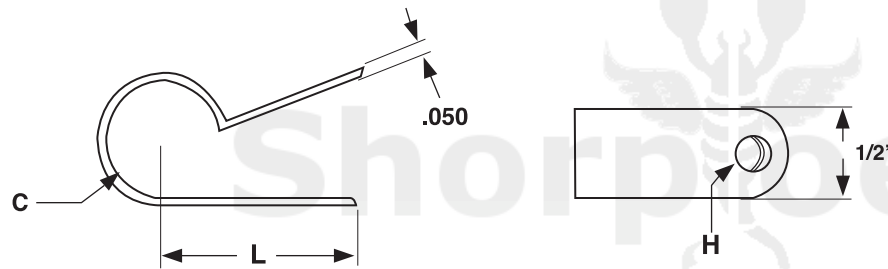

NYLON HEAVY DUTY CABLE CLAMPS—1/2" WIDE CONTACT AREA

Part Number	Size (Clamping Diam. x Hole Size x Con- tact Length)	C		H		L	
		Clamping Diameter		Hole Size		Hole-to-Clamp Length	
		Max	Min	Max	Min	Max	Min
125167CCN08	1/8x.167x.315	.130	.120	.182	.152	.330	.300
125203CCN08	1/8x.203x.315	.130	.120	.218	.188	.330	.300
188203CCN08	3/16x.203x.425	.193	.183	.218	.188	.440	.410
250167CCN08	1/4x.167x.410	.255	.245	.182	.152	.425	.395
250203CCN08	1/4x.203x.410	.255	.245	.218	.188	.425	.395
312167CCN08	5/16x.167x.500	.317	.307	.182	.152	.515	.485
312203CCN08	5/16x.203x.500	.317	.307	.218	.188	.515	.485
375167CCN08	3/8x.167x.530	.380	.370	.182	.152	.545	.515
438203CCN08	7/16x.203x.560	.443	.433	.218	.188	.575	.545
500167CCN08	1/2x.167x.595	.505	.495	.182	.152	.610	.580
500203CCN08	1/2x.203x.595	.505	.495	.218	.188	.610	.580
562167CCN08	9/16x.167x.606	.567	.557	.182	.152	.621	.591
562203CCN08	9/16x.203x.606	.567	.557	.218	.188	.621	.591
625203CCN08	5/8x.203x.678	.630	.620	.218	.188	.670	.640
688203CCN08	11/16x.203x.755	.696	.680	.218	.188	.770	.740
750167CCN08	3/4x.167x.780	.758	.742	.182	.152	.795	.765
750203CCN08	3/4x.203x.780	.758	.742	.218	.188	.795	.765
812203CCN08	13/16x.203x.815	.820	.804	.218	.188	.830	.800
875203CCN08	7/8x.203x.845	.883	.867	.218	.188	.860	.830
1000203CCN08	1x.203x.910	1.008	.992	.218	.188	.930	.895
1125203CCN08	1 1/8x.203x.970	1.135	1.115	.218	.188	1.000	.955
1250203CCN08	1 1/4x.203x1.060	1.260	1.240	.218	.188	1.075	1.045
1375203CCN08	1 3/8x.203x1.125	1.385	1.365	.218	.188	1.140	1.110
1500203CCN08	1 1/2x.203x1.190	1.510	1.490	.218	.188	1.205	1.175

Description	A molded nylon component formed into a shape that creates a cylindrical area through which wires or cables may pass. The part holds its shape until manual pressure is applied to the two flat ends to join them together. A hole in the center of the two flat ends allows for a screw to pass through and be fastened with a nut to securely close the clamp once the cables it is to hold are in place. The edges of the two ends are rounded. The size is marked on each clamp. The heavy duty series has a 1/2" wide contact area.
Applications/ Advantages	Designed for heavy duty industrial and commercial applications that involve securing, insulating and routing cable wiring, tubing and fiber optic cable.
Material	Flame Retardant Nylon 6/6
Continuous Use Temperature	220° F
Melting Point	470° F