


Flat Hd w/Nibs,  
Square Recess

DECK SCREWS W/TYPE-17 POINT

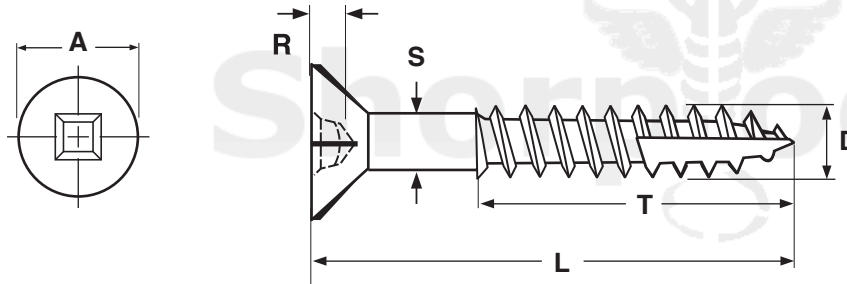

FLAT HD W/NIBS, SQUARE RECESS DECK SCREW WITH TYPE-17 POINT								
Nominal Diameter	A		R		D		S	Recess Size
	Head Diameter		Recess Depth		Major Thread Diameter		Shoulder Diameter	
	Max	Min	Max	Min	Max	Min	Ref	
6	0.262	0.237	0.065	0.040	0.142	0.131	0.104	1
8	0.311	0.286	0.075	0.064	0.177	0.157	0.124	2
9	0.336	0.308	0.075	0.064	0.177	0.169	0.126	2
10	0.378	0.341	0.075	0.064	0.199	0.186	0.137	2
Tolerance on Length		Up to 1.25"		+0 / -0.05				
		Over 1.25 to 2.5"		+0 / -0.07				
		Over 2.5 to 4"		+0 / -0.10				

<b>Description</b>	An externally threaded fastener with a countersunk head, square socket recess and a single lead thread. The bearing surface of the countersink has several equidistant nibs running down the underside of the head from the top, outer edge. The shank has a full body diameter and a chip cavity cut out where the final several threads end at the tip.
<b>Applications / Advantages</b>	The deeper thread design offers greater resistance to pull-out forces. The chip cavity (or auger point) enables the fastener to drive—especially in denser woods—without pre-drilling a pilot hole.
<b>Material</b>	18-8 Stainless steel
<b>Plating</b>	Stainless Deck screws have a commercial passivation.