


Coarse Thread, Phillips  
& Square Recess

DRYWALL & DECK SCREWS

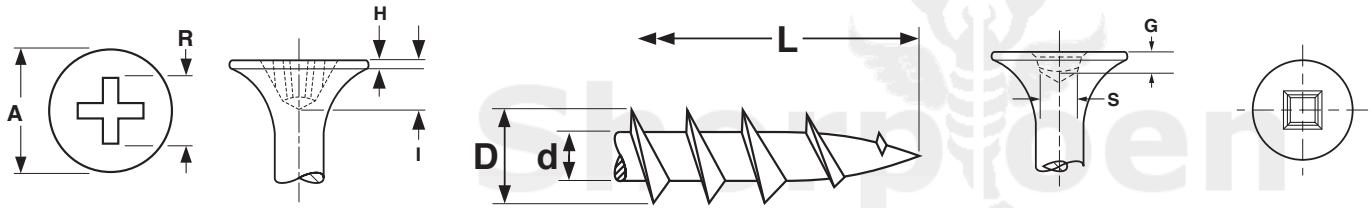

SQUARE RECESS COARSE THREAD DECK SCREWS

Screw Size	Threads per inch	D		S		G		Drive Size
		Major Diameter		Recess Square		Penetration Gaging Depth		
		Max.	Min.	Max	Min	Max	Min	
6	10	.154	.142	.091	.089	.065	.056	1
8	8	.180	.163	.113	.110	.075	.064	2
10	8	.210	.180	.113	.110	.075	.064	2
<b>Tolerance on Length</b>		Up to 1 in. incl.: -0, +0.060				Over 1 in.: -0, +0.100		
In the absence of a single industry standard for Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable.								

PHILLIPS RECESS COARSE THREAD DECK SCREWS

Screw Size	Threads per inch	D		R		I	Phillips Recess Depth	
		Major Diameter		Phillips Recess Diameter		Phillips Recess Depth		
		Max.	Min.	Max.	Min.	Ref		
6	8 to 10	.158	.142	.201	.176	.106	2	
7	8 to 10	.169	.153	.201	.176	.118	2	
8	8 to 10	.187	.170	.201	.176	.124	2	
9	8	.195	.180	.201	.176	.124	2	
10	8	.211	.192	.204	.190	.124	2	
12	8	.239	.212	.265	.250	.144	3	
1/4	8	.270	.240	.277	.260	.160	3	
<b>Tolerance on Length</b>		Up to 1 in. incl.: -0, +0.060				Over 1 in.: -0, +0.100		
In the absence of a single industry standard for Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable.								

NOTE: There is no single standard for deck screw dimensions. These values are offered as a guide; deviations from these specifications may occur.

	Steel	Stainless
<b>Description</b>	A bugle head screw with spaced threads, extra sharp point and dactrozited finish.	A bugle head screw with spaced threads and extra sharp point, manufactured of corrosion-resistant stainless steel.
<b>Applications/ Advantages</b>	Designed specifically for joining pieces of pressure treated lumber. Provides corrosion resistance superior to phosphate-coated drywall screws without discoloring the wood. The square drive recess is preferred by some for its excellent torque transmission and resistance to cam-out problems.	Designed specifically for joining pieces of pressure treated lumber. Remains resistant to corrosion for approximately twice as long as do dactrozited steel deck screws.
<b>Material</b>	AISI 1018 or equivalent steel	18-8 passivated stainless steel
<b>Hardness</b>	HV 550 - 800	Rockwell B 85 - 95
<b>Plating</b>	Steel deck screws have a dactrozited finish.	Stainless deck screws require no additional coating.